




100 Hancock Ave
Hamilton, Ohio 45011

www.jetstream-usa.com
800-524-4889

Instructions for JTBAL11

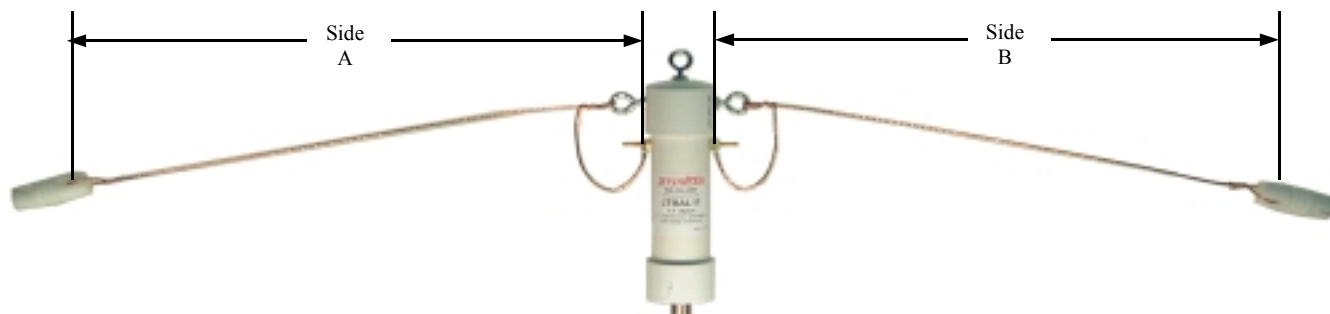

Basic Instructions

This 1:1 balun may be used for all kinds of antennas. The dimensions below are for a 1/2 wave dipole for the ham bands just to get you started. These are starting dimensions. Size of wire, environment, etc can change the length of wire needed. It is always best to cut your wire a little long. Then when tuning just fold the wire back on itself so you can lengthen it later.

Dipoles may be installed in an inverted V, Flat top, or V shape. Each will have different radiation patterns.



| Frequency (Mhz) | Side A (ft) | Side B (ft) | Total length (ft) |
|-----------------|-------------|-------------|-------------------|
| 3.75 | 62.4 | 62.4 | 124.8 |
| 5.36 | 43.7 | 43.7 | 87.4 |
| 7.15 | 32.7 | 32.7 | 65.4 |
| 10.125 | 23.1 | 23.1 | 46.2 |
| 14.175 | 16.5 | 16.5 | 33 |
| 18.1 | 12.9 | 12.9 | 25.8 |
| 21.225 | 11 | 11 | 22 |
| 24.9 | 9.4 | 9.4 | 18.8 |
| 29.0 | 8 | 8 | 16 |

Specifications:

Max power: 2000 watts
Connector: SO239
Transformer Type
Ratio 1:1
3.5-30 Mhz

Safety Instructions:

Do not install on a rainy or windy day.
Do not install near power lines.
Do not install by yourself, always have someone else near by to help.
If antenna comes in contact with electric lines, do not try to remove. Call your electric company immediately.
If you do not have experience at installing antennas, seek the help of a professional.

www.jetstream-usa.com 800-524-4889